



TYPICAL GAPPING DETAIL


ROADWAY TYPE	RIGHT SHOULDER WIDTH (RSW)	GROOVE WIDTH (BOTH SHOULDERS)	LOCATION OF RIGHT SHOULDER STRIP
UNDIVIDED	$< 6'$	6"	EDGE LINE
UNDIVIDED	$\geq 6'$	8"	12" OFFSET FROM EDGE LINE
DIVIDED	$< 6'$	8"	EDGE LINE OR 4" OFFSET
DIVIDED	$\geq 6'$	12"	12" OFFSET FROM EDGE LINE

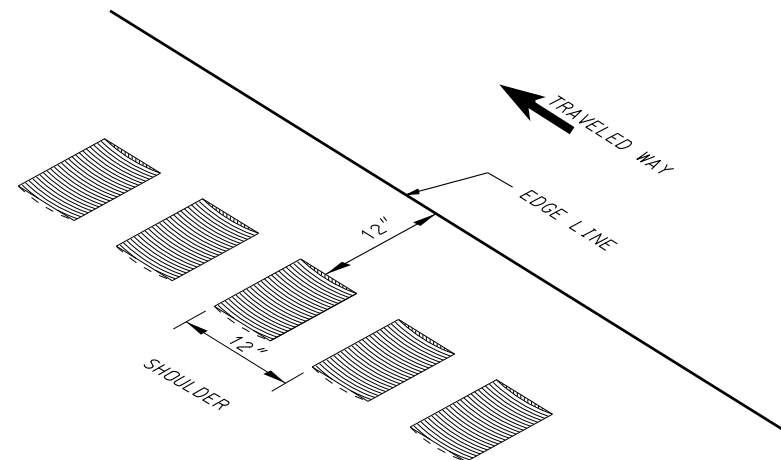

TYPICAL SHOULDER INSTALLATION
LEFT SHOULDER DETAIL

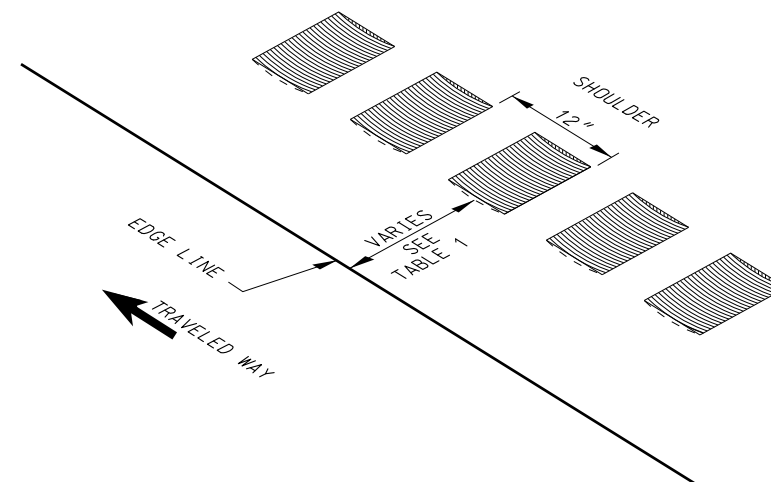


TYPICAL SHOULDER INSTALLATION
RIGHT SHOULDER DETAIL

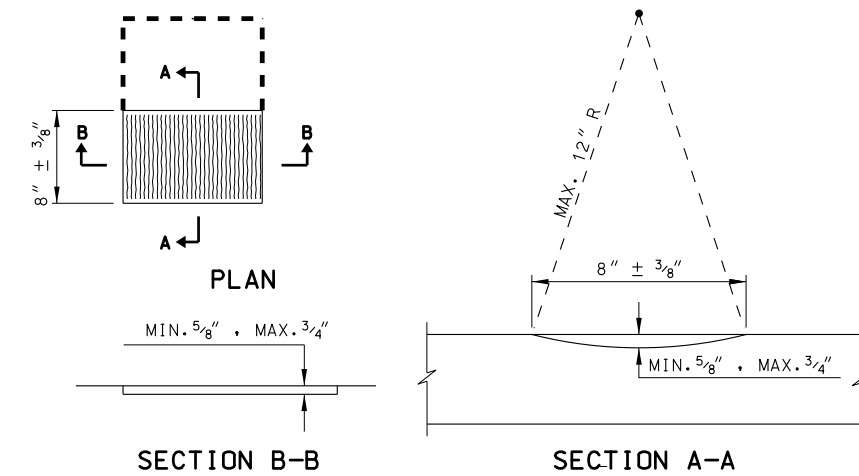


RUMBLE STRIP DETAILS

- NOTES:

1. MILL RUMBLE STRIPS TO LEAVE A RECTANGULAR SHAPE WITH UNIFORM EDGES. DO NOT DAMAGE ADJACENT PAVEMENT DURING MILLING OPERATION.
2. DO NOT PLACE RUMBLE STRIPS ON STRUCTURES OR APPROACH SLABS.
3. RESTART RUMBLE STRIP SEQUENCE (48 STRIPS, SKIP 12 STRIPS) WHEN RUMBLE STRIPS ARE HALTED OR INTERRUPTED.

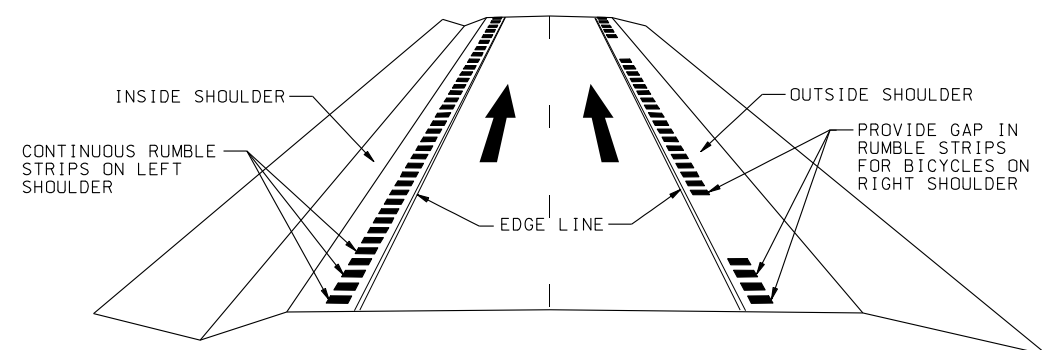

PERSPECTIVE VIEW (MULTI-LANE ROADWAY)

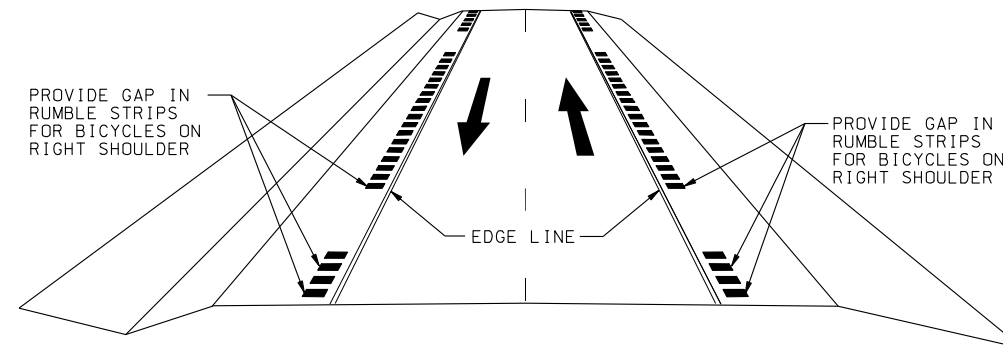

PERSPECTIVE VIEW (TWO-LANE ROADWAY)

[illegible]